



myCharge name, logo and Peak are trademarks of RFA Brands. "Made for iPhone" means that an electronic accessory has been designed to connect specifically to iPhone and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone may affect wireless performance. Apple and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by RFA Brands is under license. All other trademarks are the property of their respective owners.
©2012-2013 RFA Brands. All Rights Reserved. Patent pending.


Owner's Manual

Thank you for
choosing myCharge
Trek™ 2000

Thanks for choosing myCharge.

In The Box


- myCharge Trek
- Lanyard
- Owner's Manual
- Warranty Manual

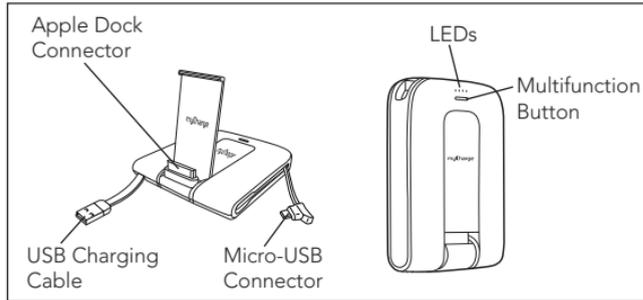

Section I: Quick Start

1. Charge up your Trek by plugging it into a USB power adapter or computer. As Trek charges, LEDs on the unit will sequentially illuminate. When the unit is fully charged, all LEDs are lit. Press the level check button to see how much power is available.
2. Connect your device to either the flip-out Apple Dock Connector or the Micro-USB connector.
3. Unplug your iPod, iPhone, or Micro-USB device when it's charged and go! Your Trek will automatically power off after your devices are unplugged.

Section II: Charging Trek

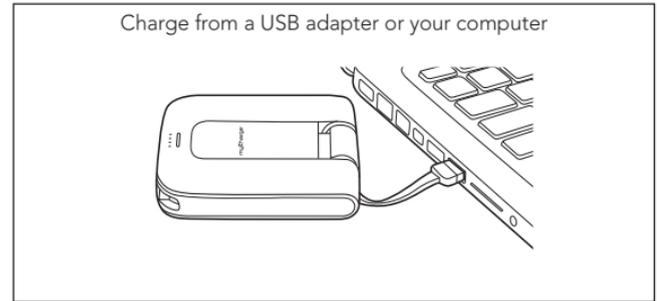

To charge your Trek, connect it to a USB power source (Apple iPhone adapter, notebook USB port) with the on-board green USB input cable. Times to charge the Trek vary based on what it's plugged into. You can expect a full charge from an iPhone USB adapter in about three hours, or from a standard notebook USB port in about five hours.

Note: It is normal for your Trek to be warm to the touch while in use.

Section III: Charging Devices

Trek uses an automatic device detection system. When devices are plugged in, the Trek provides charging power until they are unplugged or the Trek runs out of energy. Trek's automatic load balancing system will prioritize its outputs to optimize charging. In most cases, Trek will charge 2 devices at once. In the event that two high-powered devices with depleted batteries are plugged in, the Trek gives priority to the Apple Dock Connector over the Micro-USB connector. Once the high-powered Apple device (iPhone) nears a full charge, the Micro-USB device will begin charging. Low-powered Apple devices like iPod nano and iPod classic don't draw as much power, so multiple devices can charge simultaneously.

The Trek Apple Dock Connector is compatible with iPhone and most iPod models. The Micro-USB connector supports the majority of mobile devices including smartphones, Bluetooth® headsets, portable navigation devices, MP3 players, and more.

Section IV: Checking Battery Level

To check how much energy is available, press the level check button. LEDs next to the button will illuminate indicating approximately how much energy is available for use.

LED 1 Flashing: Under 20%

LED 1: 21-40%


LED 2: 41-65%

LED 3: 66-90%

LED 4: 91-100%

Section V: Syncing


iPhone or iPod can be synced with iTunes while connected to Trek. Plug in your Apple device to the Apple 30-pin connector and plug in the USB-A input cable to your computer, press and hold the multifunction button for two seconds, and your device will sync.



Note: Sync is not supported through the Micro-USB connector.

Section VI: Sound Mode

Trek has built-in tone capability. Tone mode will audibly inform you when devices are plugged in or disconnected, and when the unit is charging or has completed charging.

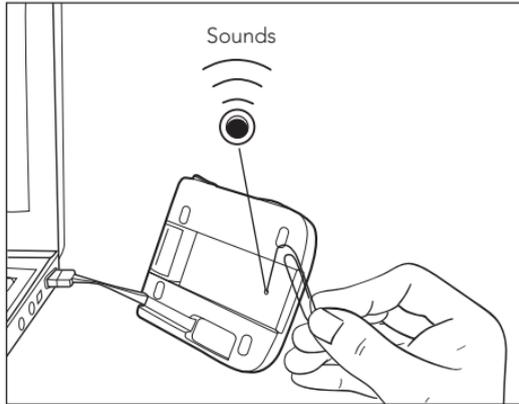


To disable, enable and/or change the sound mode

1. Locate the Sound pinhole button on the back of the unit
2. Plug Trek into your PC
3. Use a paperclip to cycle Tone → Silent

If you prefer no sound toggle to the silent mode - unit will make no sound when this option is selected. If you prefer tone mode toggle until you hear the tone.

Section VII: Lanyard Strap

Your Trek includes a lanyard strap for easy portability. To affix it to Trek, slide the skinny loop of the strap under the rod in the opening, then pull the thick strap through the loop.

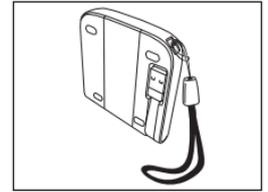

Section VIII: Maintenance

To keep Trek operating at its full potential, please do the following:

1. Re-charge every three months when not in use.
2. Keep dry and away from moist and corrosive materials.
3. To clean, wipe surface with dry cloth.

Section IX: Product Specifications

Battery: 2000 mAh Lithium Polymer

Input:

USB-A: 5 VDC, 1.0 A

Output:

Apple 30-pin: 5 V, 1.0 A

Micro-USB: 5 V, 1.0 A

Total Output Current: 5 V, 1.0 A

Section X: Troubleshooting

My device is not charging: Confirm that your device is properly connected to the Apple connector and the Trek itself has energy (by pressing the level check button). LEDs indicate how much energy is available for use. If multiple devices are connected, disconnect them and connect only the device that is not charging. Automatic load balancing charges devices in priority of Apple Dock Connector followed by Micro-USB connector. If the power requirements of the devices exceed the total output capabilities of the Trek, some devices may not begin to charge until others finish charging.

My device doesn't sync with iTunes: Refer to Section V: Syncing.

I don't want the tone function on: Refer to Section VI: Sound Mode.

For additional troubleshooting information and device compatibility, please visit: www.mycharge.com

myCharge Service Center

Telephone: (888) 251-2026

Hours: 24/7

E-mail: cservice@mycharge.com